DESCRIPTION

5" round recessed lensed showerlight fixture. U.L. listed for wet location. For use with 12V MR16 lamp 37W max., Metal Halide MR16 20W or 39W. For use with Accurus housings.

For use in downlighting applications.

Catalog #		**Type**
Project		
Comments		**Date**
Prepared by		

SPECIFICATION FEATURES

A ...Trim
Round fixed trim showerlight fixture. Includes Solite diffusion lens with silicone seal.

B ...Lamp
For use with 12V MR16 lamp 37W max. Metal Halide MR16 20W or 39W. Lamp not included. Solite soft focus lens is included. Fixture can accept up to one (1) optical accessories total.

C ...Socket
Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Accurus Housing sold separately)

D ...Finish
Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

E ...Safety
Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

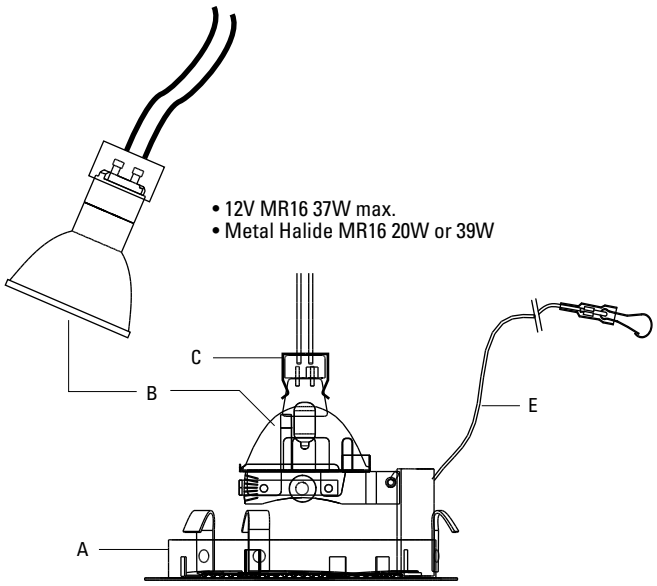

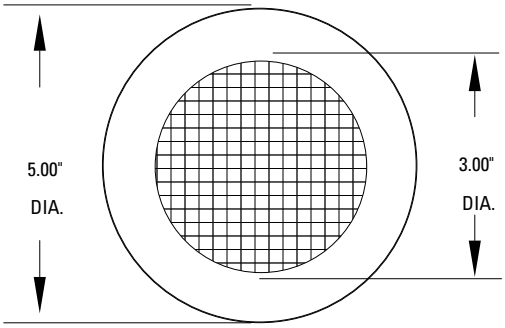

ACCURUS TRIM

ACT1986
5" Round Recessed Showerlight Fixture

12V MR16 37W max.
METAL HALIDE MR16 20W or 39W

Compatible Housings:
ACT950 / ACT950MH
ACT952IC / ACT952ICMH
ACT954RM / ACT954RMMH

c UL us Suitable for Wet Location

ORDERING INFORMATION

ACT1986	

Fixture
ACT1986 =
5" Round Trim
Fixed Showerlight Fixture

Finish
WH = White
BK = Black
S = Industrial Silver
SS = Stainless Steel (painted)
PM = Primer